



CITGO CONCRETE FORM OIL

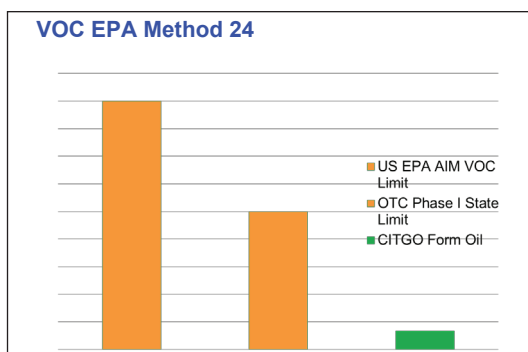
Date 08/12

DESCRIPTION: CITGO Concrete Form Oil is a light colored, non-staining, low volatile organic content (VOC) oil for use on concrete forms where an excellent surface finish is desired.

QUALITIES: CITGO Concrete Form Oil is specially formulated with high quality base stocks and additives including a combination spreading and release agent which:

- Provides excellent surface finish.
- Provides even spreading of the oil on wood or steel forms and prevent cement sticking to forms.
- Prevents staining, build-up and corrosion of forms.
- Meets U. S. EPA AIM and OTC Phase I State VOC requirements.

APPLICATIONS: CITGO Concrete Form Oil may be used for all concrete form applications. With excellent non-staining characteristics, it is recommended for applications requiring excellent surface finish including production of burial vaults, white stone furniture and other specialty concrete products.

**TYPICAL PROPERTIES:****CITGO CONCRETE FORM OIL**

Material Code	643205001
Gravity, ASTM D 4052, °API	27
Density, lb/gal at 60°F	7.43
Flash Point, COC, Min., ASTM D 92, °F (°C)	384 (196)
Viscosity, ASTM D 445, cSt at 40°C	20
cSt at 100°C	3.8
ASTM D 2161, SUS at 100°F	106
SUS at 210°F	39
Viscosity Index, ASTM D 2270	70
Pour Point, Max, ASTM D 97, °F (°C)	-33 (-36)
Color, ASTM D 1500	1.0
Saponification No., ASTM D 94	10.8
Copper Corrosion, ASTM D 130	1A