

HYDRAULIC OIL RP 22

Hydraulic oil with enhanced corrosion protection

Product description

HYDRAULIC OIL RP 22 is a hydraulic oil that has been specifically developed for test rigs. The product contains additives which provide a high level of protection against wear and corrosion.

Application areas

The product is specifically designed for test rigs but can also be used as corrosion protection for hydraulic components during transport and storage.

Characteristics and advantages

HYDRAULIC OIL RP 22 is formulated using highly refined mineral base oils and carefully selected, high quality additives. This combination creates a product with extremely good corrosion protection, providing excellent antiwear properties and high oxidation stability. The product is zinc-free which lowers the risk of allergic reactions and reduces the environmental impact.

Tests and approvals


Handling and storage

For additional information, see Safety Data Sheet

Typical Data

Characteristics	Typical value	Unit	Method
Density at 15°C	901	kg/m ³	ISO 12185
Flash point COC	172	°C	ISO 2592
Viscosity at 40°C	22	mm ² /s	ISO 3104
Viscosity at 100°C	3.7	mm ² /s	ISO 3104

Revision date 29-May-2015

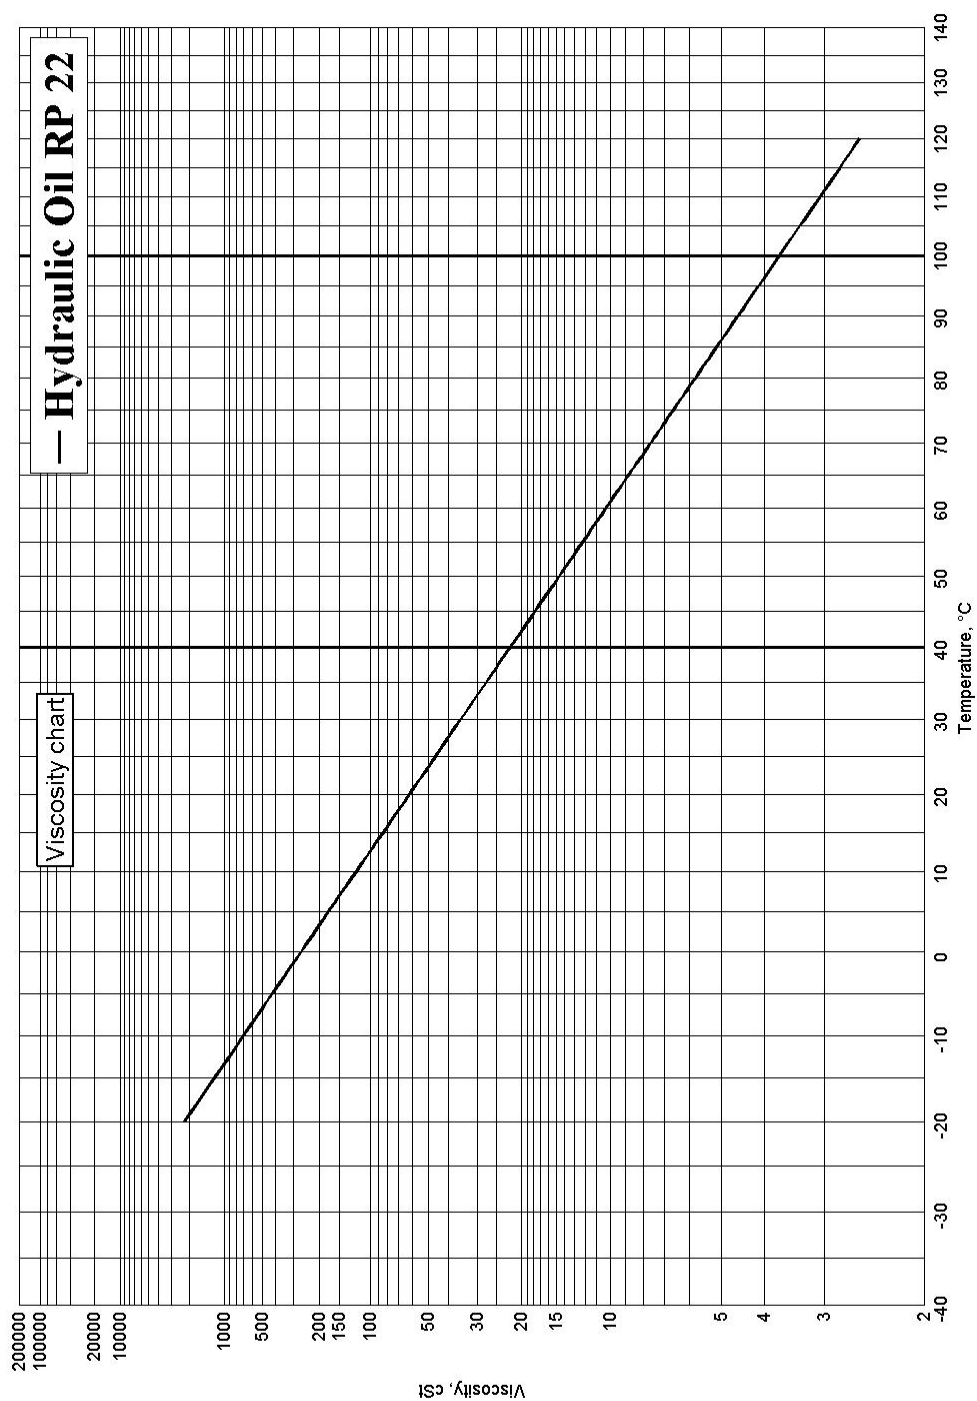

Revision date 29-May-2015