

# HYDRAWAY EXTREME 32

High performance hydraulic oil for high loaded applications

## Product description

HYDRAWAY EXTREME 32 is a mineral based hydraulic oil developed to meet requirements of modern hydraulic high pressure pumps and systems. Special combination of premium additives and base oils make it effective in extremely high loaded applications with excellent performance. The product is recommended for all indoor hydraulic systems and certain outdoor hydraulic systems.

## Application areas

HYDRAWAY EXTREME 32 is a mineral oil-based hydraulic oil for use in all types of hydraulic systems, especially in modern heavy-loaded systems working at high temperatures. The oil can be used as compressor oil, circulation oil and for bearings and gears.

## Characteristics and advantages

HYDRAWAY EXTREME 32 provides excellent anti-wear properties and has a low tendency for foaming. The filterability and air release are excellent. The product is extremely antioxidation-stable and ensures good working conditions even in the presence of water. These advantages ensure a long service-life and extended drains are possible. The anti-wear additives contains zinc in order to provide the best performance and it also contains additives that prevent foaming, corrosion and oxidation.

## Tests and approvals

Specifications: ISO 6743/4 L-HM, DIN 51524/2 HLP

Fulfills: Denison HF-0, HF-1, HF-2, Eaton M-2950-S and I-286-S3, Cincinnati Machine P68, P69, P70


## Handling and storage

Avoid skin contact. In the event of contact with skin, wash with soap and water. Dispose of used oil at a recycling station or equivalent. Safety data sheets are available for professional users and are supplied on request.

## Typical Data

Characteristics	Typical value	Unit	Method
Density at 15°C	870	kg/m <sup>3</sup>	ISO 12185
Flash point COC	216	°C	ISO 2592
Pour Point	-30	°C	ISO 3016
Viscosity at 40°C	32	mm <sup>2</sup> /s	ISO 3104

Revision date 24-Sep-2015

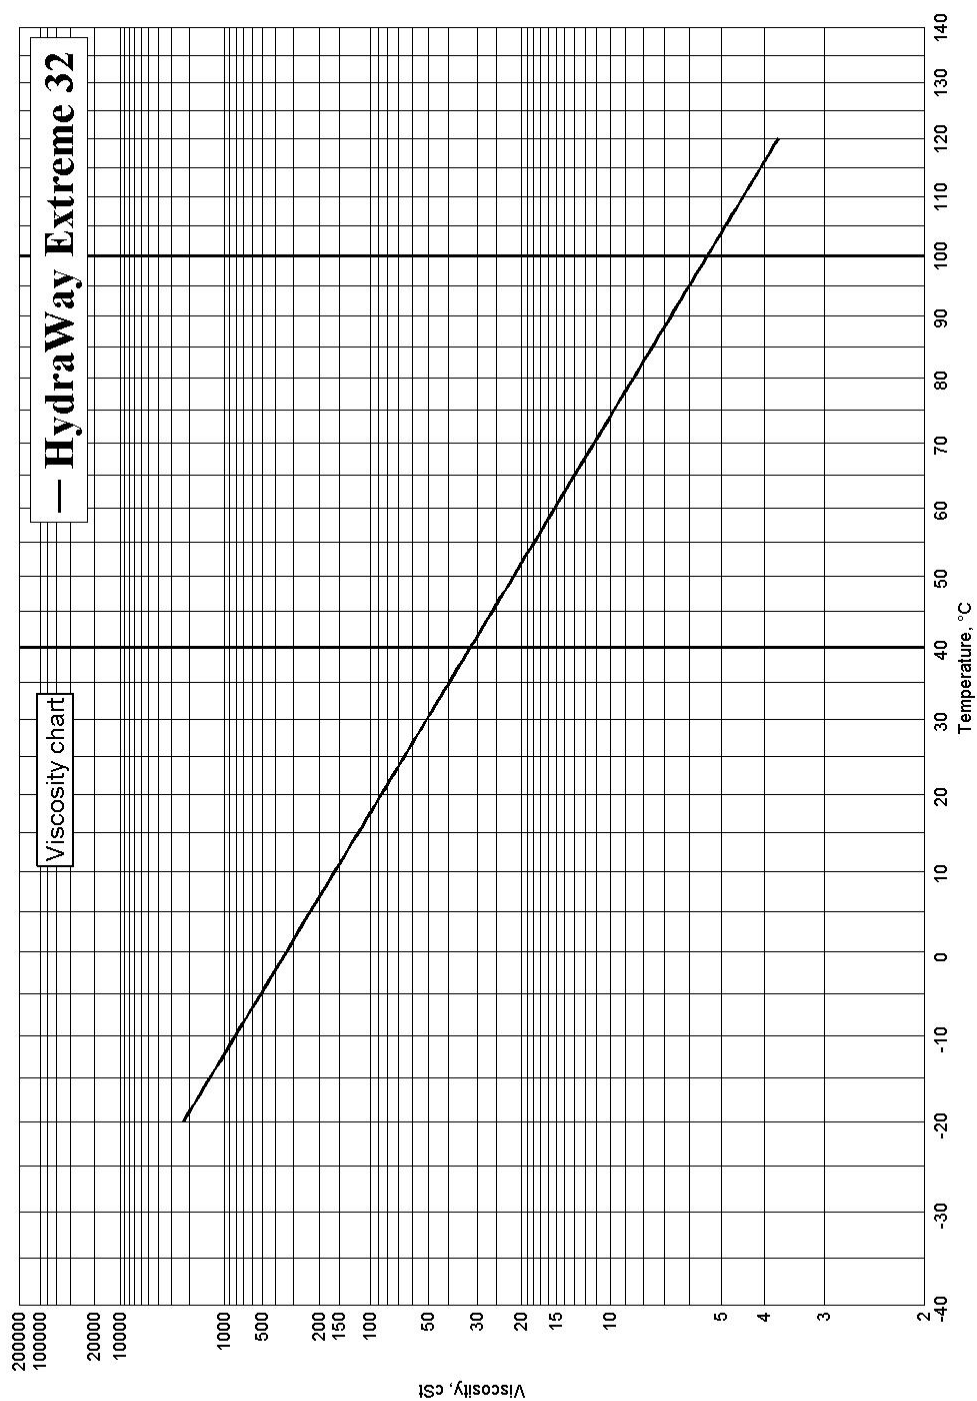

Revision date 24-Sep-2015