

HYDRAWAY HVXA 32 HP

High performance hydraulic oil, primarily for outdoor use

Product description

A high-performance, zinc-free hydraulic oil with a long lifetime for modern hydraulic systems that are used outdoors.

Application areas

Has been developed for use in hydraulic systems that work in demanding conditions. The oil is very suitable for systems that have to start and work in very low temperatures.

Characteristics and advantages

Exceeds most users' demands for a high-performance hydraulic oil that is used across a wide temperature range. The oil is ash-free and thereby eliminates filter-related operating problems. The oil delivers excellent wear protection, counteracts sludge formation and offers exceptionally rapid air and water separation. The Hydraway HVXA HP oils can be mixed with most hydraulic oils on the market.

Tests and approvals

Specifications: ISO 6743/4 L-HV, DIN 51524/3 HVLP, SS 155434

Fulfills: Denison HF-0, HF-1, HF-2; Cincinnati Machine P-68, P-69, P70


Handling and storage

Avoid skin contact. In the event of contact with skin, wash with soap and water. Dispose of used oil at a recycling station or equivalent. Safety data sheets are available on www.statoilubricants.com or supplied on request.

Typical Data

Characteristics	Typical value	Unit	Method
Density at 15°C	848	kg/m ³	ISO 12185
Flash point COC	206	°C	ISO 2592
Pour point	-45	°C	ISO 3016
Viscosity at 40°C	33.0	mm ² /s	ISO 3104
Viscosity at 100°C	7.0	mm ² /s	ISO 3104
Viscosity index	180	-	ISO 2909

Revision date 24-Sep-2015

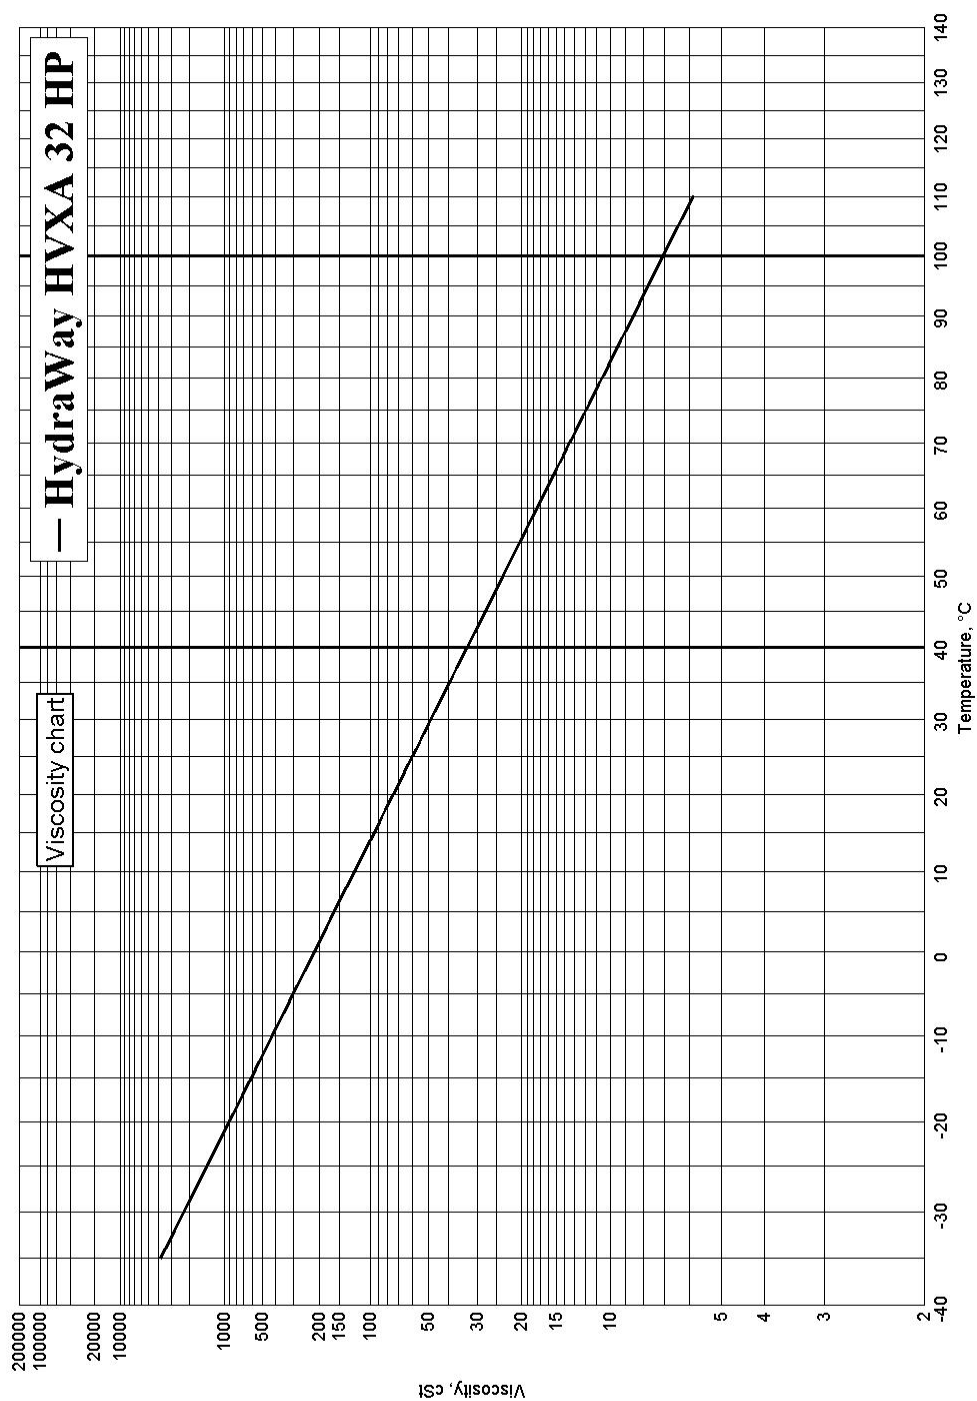

Revision date 24-Sep-2015