



HYDRAWAY SE 15 HP

High performance biodegradable hydraulic oil

Product description

HYDRAWAY SE 15 HP is a biodegradable ester-based hydraulic oil delivering very good performance.

Application areas

HYDRAWAY SE 15 HP is designed for demanding hydraulic systems, mainly in cold climates. The product combines superior oxidation stability and hydrolytic properties which provides the product with a long life time.

Characteristics and advantages

HYDRAWAY SE 15 HP is based on renewable synthetic esters. The product is biodegradable and has a low toxicity. The technical benefits comprise extremely good oxidation stability, superior hydrolytic stability, good low temperature properties and high viscosity index.

Tests and approvals

Vickers V-104C, PRVOT: 1200 min


Handling and storage

Avoid skin contact. In the event of contact with skin, wash with soap and water. Dispose of used oil at a recycling station or equivalent. Safety data sheets are available for professional users and are supplied on request.

Typical Data

Characteristics	Typical value	Unit	Method
Density at 15°C	919	kg/m ³	ISO 12185
Flash Point COC	186	°C	ISO 2592
Flash point PM	169	°C	ISO 2719
Pour point	-66	°C	ISO 3016
Viscosity at 40°C	12.0	mm ² /s	ISO 3104
Viscosity at 100°C	3.2	mm ² /s	ISO 3104
Viscosity index	140	-	ISO 2909

Revision date 24-Sep-2015

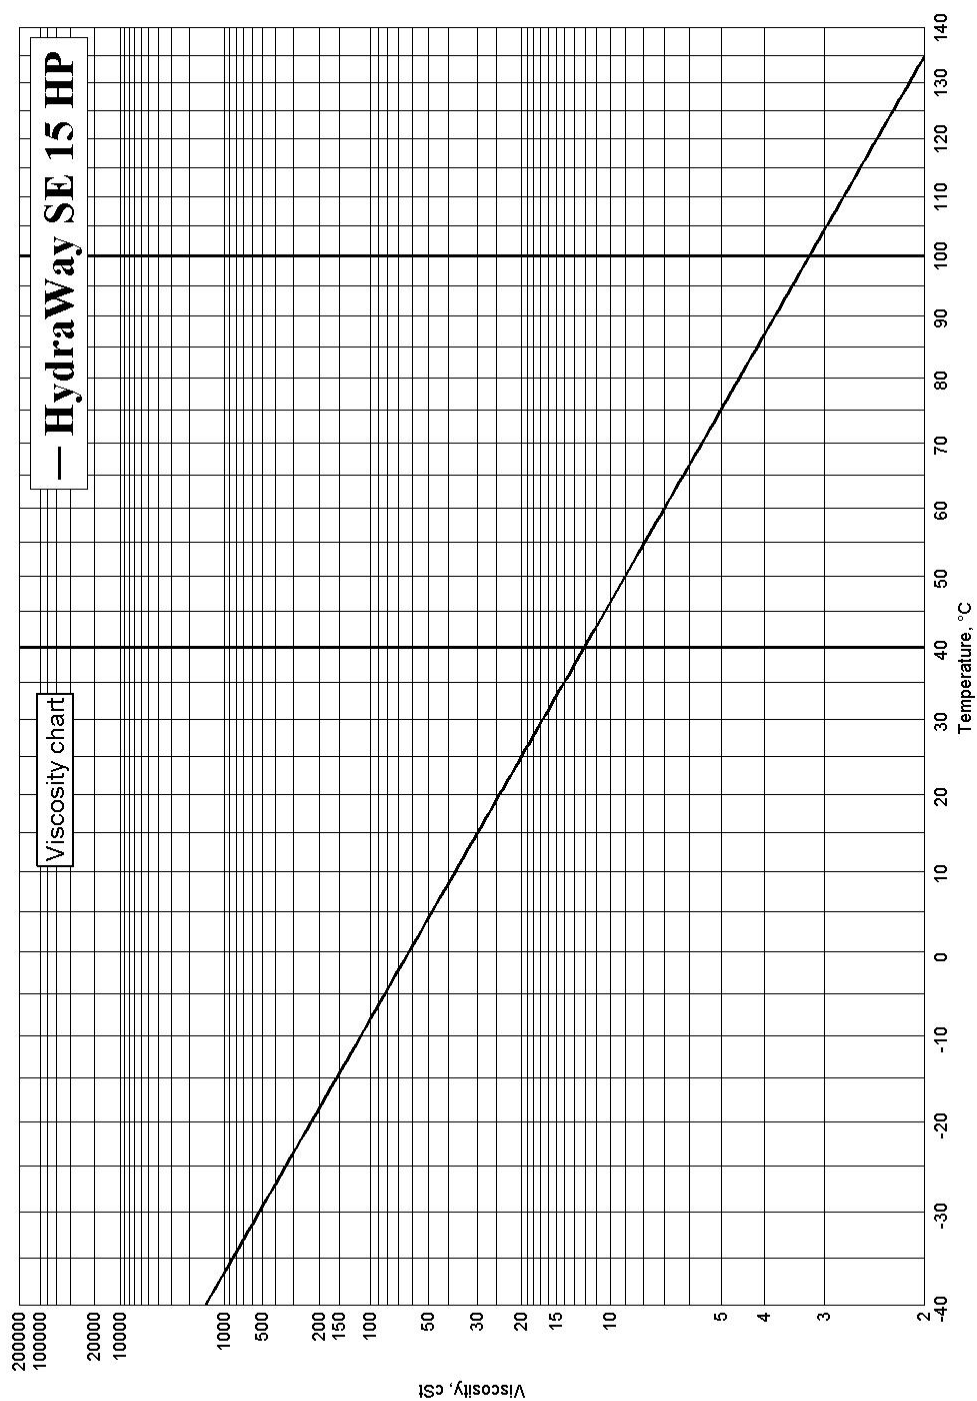

Revision date 24-Sep-2015