

ROCKWAY EP 32

Pneumatic tool oil

Product description

ROCKWAY EP 32 is a pneumatic tool oil of very high quality. The product is made of solvent-refined paraffin base oil and special additives, which counteract wear and corrosion and produce good adhesion.

Application areas

ROCKWAY EP 32 can be used for all types of percussive pneumatic machines. It is used both within industrial applications as well as the building and construction sector, and within mining and quarrying.

Characteristics and advantages

ROCKWAY EP 32 is made of solvent-refined paraffin base oil and special additives, which counteract wear and corrosion and produce good adhesion. For working environment reasons, the oil has been formulated to produce the least possible oil mist. The product's high viscosity index ensures good lubrication at both high and low temperatures. The properties of ROCKWAY EP 32 reduce wear and maintenance costs, as well as contributing to a longer component lifetime.

Tests and approvals


Handling and storage

Avoid skin contact. In the event of contact with skin, wash with soap and water. Dispose of used oil at a recycling station or equivalent. Safety data sheets are available on www.statoilubricants.com or supplied on request.

Typical Data

Characteristics	Typical value	Unit	Method
4-ball, WL	276	kg	ISO 20623
Density at 15°C	872	kg/m ³	ISO 12185
Flash point COC	204	°C	ISO 2592
Pour point	-33	°C	ISO 3016
Viscosity at 40°C	34	mm ² / s	ISO 3104
Viscosity at 100°C	6.2	mm ² / s	ISO 3104
Viscosity index	130	-	ISO 2909

Revision date 12-Jan-2015

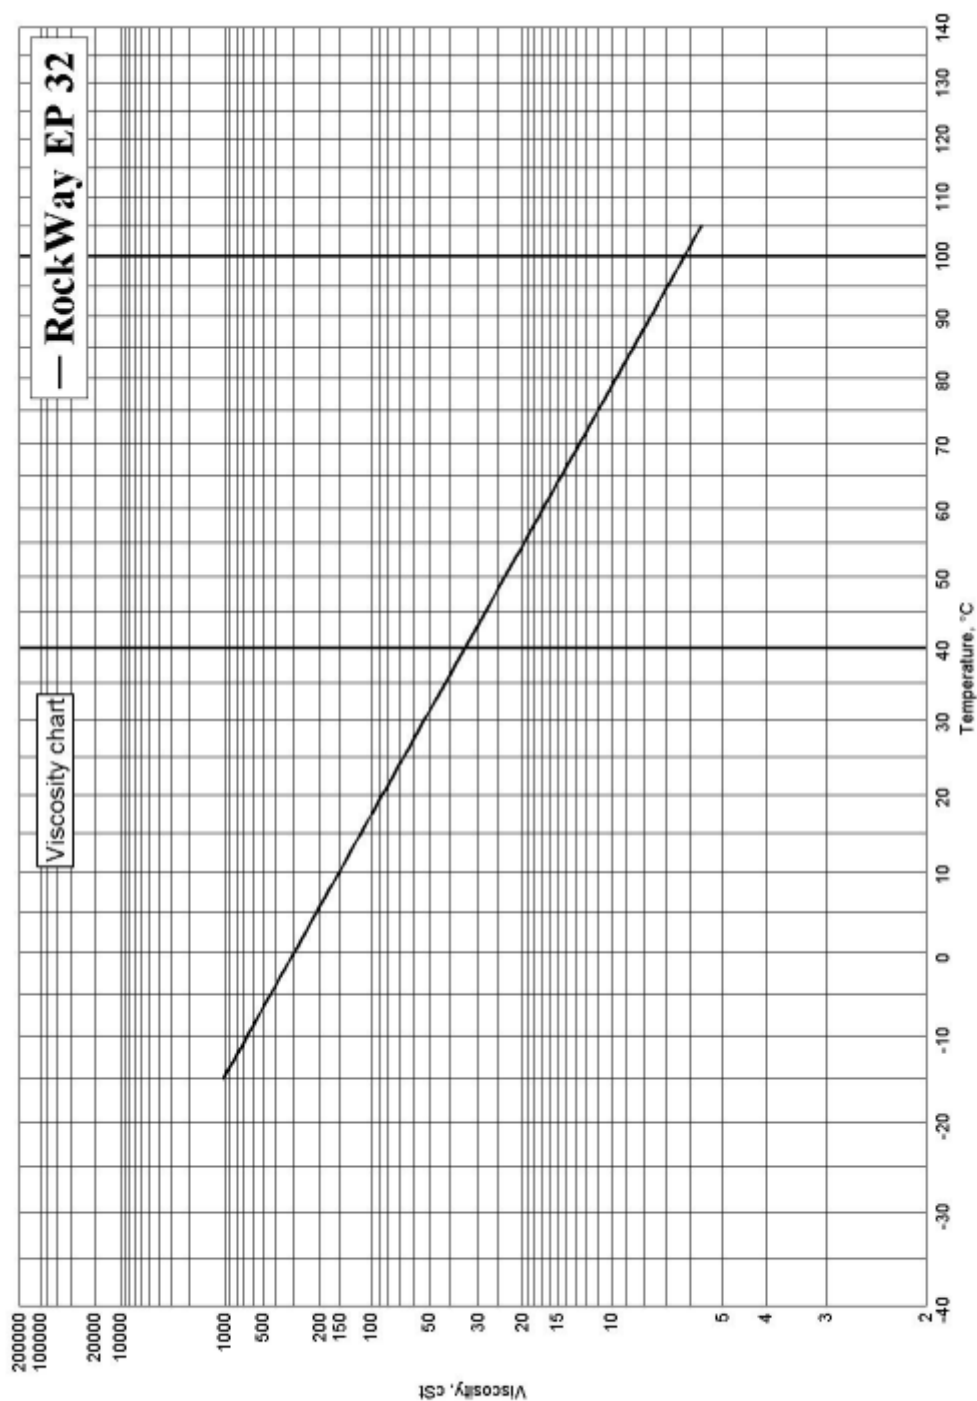

Revision date 12-Jan-2015