

# THERM OIL 30

## High quality heat transfer oil

### Product description

THERMOIL 30 is a high-quality, specially developed, semi-synthetic heat transfer oil.

### Application areas

THERMOIL 30 is a specially developed heat transfer oil for oil rigs, which is also suitable for other types of systems where a heat transfer oil with these properties are required.

### Characteristics and advantages

THERMOIL 30 is a semisynthetic heat transfer oil. The very low flow temperature means that the product functions optimally with good pumpability at low temperatures. Due to its high flashpoint, THERMOIL 30 can be used to advantage at high operating temperatures. THERMOIL 30 can be used within a very wide temperature range.

### Tests and approvals


### Handling and storage

Avoid skin contact. In the event of contact with skin, wash with soap and water. Dispose of used oil at a recycling station or equivalent. Safety data sheets are available on [www.statoillubricants.com](http://www.statoillubricants.com) or supplied on request.

### Typical Data

Characteristics	Typical value	Unit	Method
Density at 15°C	837	kg/m <sup>3</sup>	ISO 12185
Flash point COC	237	°C	ISO 2592
Pour point	-33	°C	ISO 3016
Viscosity at 40°C	30.5	mm <sup>2</sup> /s	ISO 3104

Revision date 19-Aug-2014

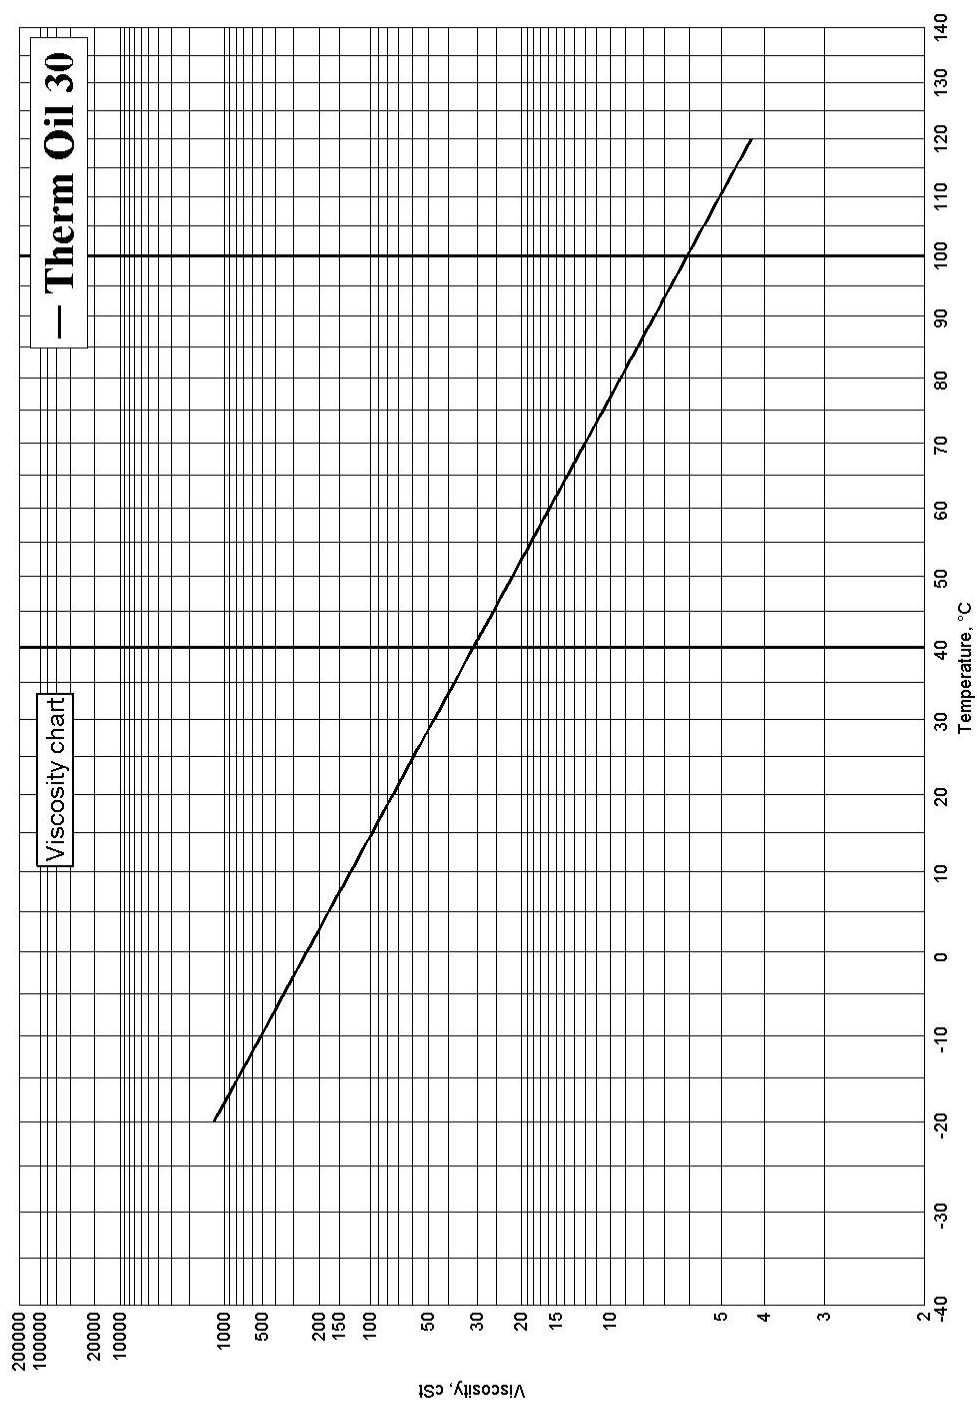

Revision date 19-Aug-2014